



EC6 PRO SERIES FAN

Adjustable Performance. Mitigation Flexibility.

Radon and Vapor Intrusion Mitigation Fan

All RadonAway® fans are specifically designed for commercial and residential radon and vapor intrusion mitigation. Our EC6 Fan provides built-in flexibility to allow the professional mitigator to design and build the mitigation system while bringing only one fan to the job site. The EC6 runs quietly and is ideal for most sub-slab and sub-membrane depressurization/ventilation systems.



Made in USA with U.S. and imported parts.




ETL Listed



All RadonAway® inline radon fans are covered by our 5-year, hassle-free warranty.

EC Technology

The EC6 Pro Series Fan features an electronically commutated (EC) motor with built-in speed control that enables the professional installer to dial in the desired pressure and airflow to best meet site conditions.



Features

- Speed control to dial in the optimal pressure and airflow based on site conditions
- Eternalast™ polycarbonate plastic housing
- ETL Listed for indoor or outdoor use
- HVI certified fan performance
- Rated for commercial or residential use
- Energy efficient
- Seams sealed to inhibit radon leakage
- Water-hardened motorized impeller
- Thermally protected motor
- Ultra-quiet operation








EC6 PRO SERIES

TECHNICAL SPECIFICATIONS

MODEL	P/N	FAN DUCT DIAMETER	WATTS	RECOM. MAX. OP. PRESSURE "WC	TYPICAL CFM vs. STATIC PRESSURE WC										
					0"	.2"	.5"	1.0"	1.5"	2.0"	2.5"	3.0"	3.5"	4.0"	4.5"
EC6	28625	6"	140-175	4.25	514	490*	451	381	330	271	211	152	101	49	-
		4"***	112-175	4.75	341	330	304	271	239	204	175	137	87	49	31

*HVI Certified Value. **Using 6"x4" reducing coupling.

PERFORMANCE CURVES

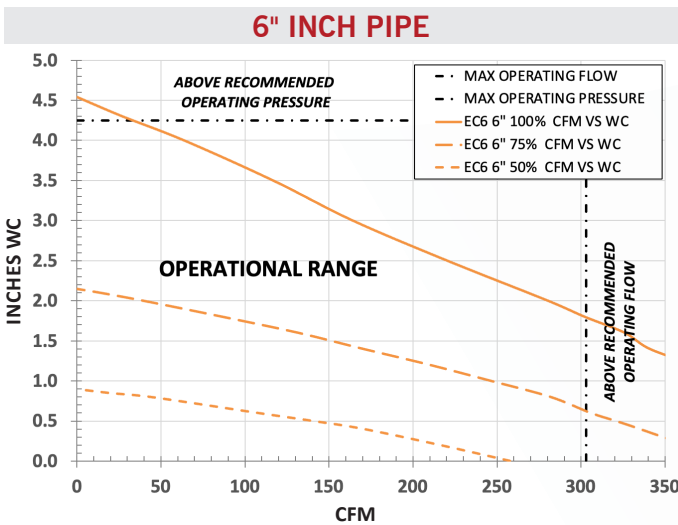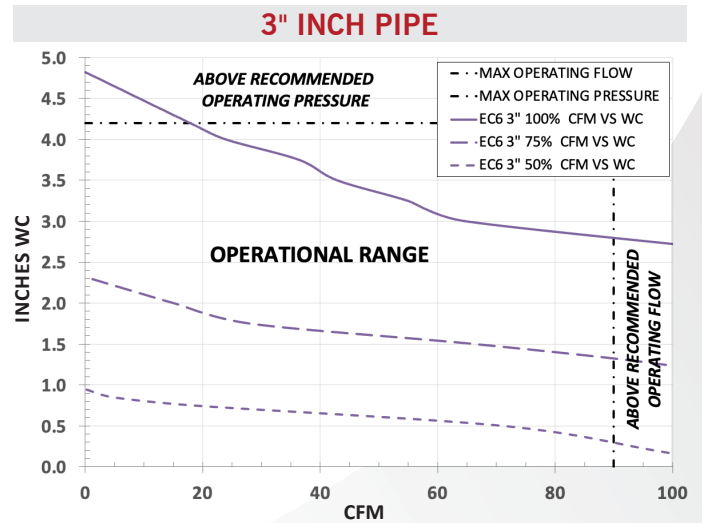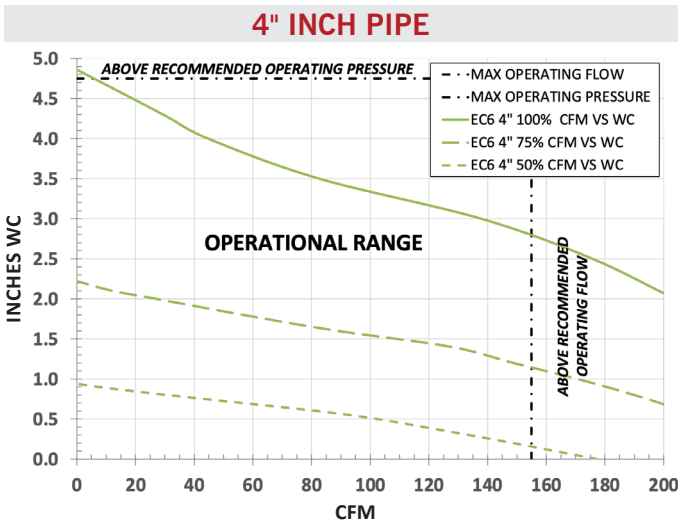

FAN DIMENSIONS



Model	A	B	C
EC6	6"	11.75"	9.1"

