

# GX PRO SERIES




## GX3/GX4




### Features

- Revolutionary patent pending design
- Eternalast™ polycarbonate plastic housing
- Water-hardened thermally-protected motor
- Optimal for moderate to tight soils
- Quiet operation
- Rated for indoor and outdoor use
- Rated for commercial or residential use
- Vapor Tite™ technology to inhibit radon and soil gas leakage
- ETL listed by Intertek to UL507 and CSA C22.2 Standards

MODEL	P/N	FAN DUCT DIAMETER	WATTS	RECOM. MAX. OP. PRESSURE "WC	TYPICAL CFM vs. STATIC PRESSURE WC					
					0"	1.0"	2.0"	3.0"	4.0"	5.0"
GX3	28584	3"	60-135	3.3"	115	96	72	40	-	-
GX4	28585	3"	70-170	4.0"	117	99	83	59	20	-

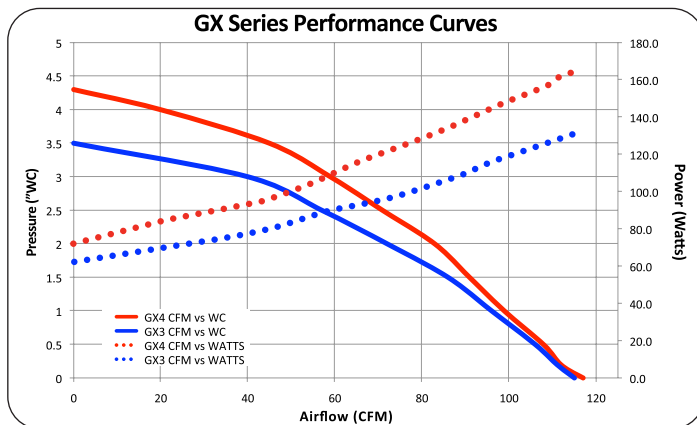

MODEL	DUCT SIZE - OD (d)	DIAMETER (D)	HEIGHT (H)
GX3	3.5"	11.9"	10.9"
GX4	3.5"	11.9"	10.9"

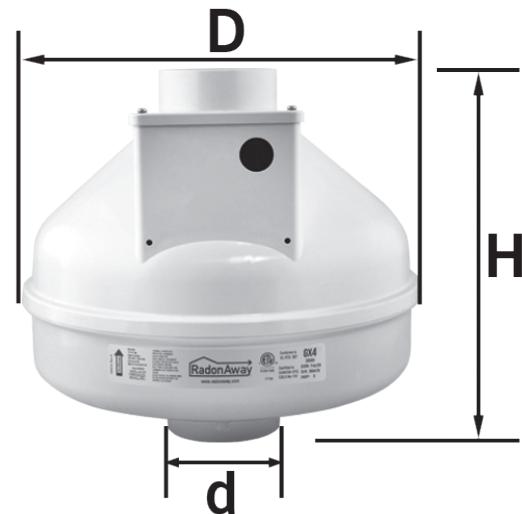

with U.S. and imported parts.



ETL Listed



RadonAway® Pro Series inline radon fans are covered by a 5-year, limited warranty.

For more information  
(800) 767-3703  
RadonAway.com

